


## 62 Series - Pull Handle

Not to scale

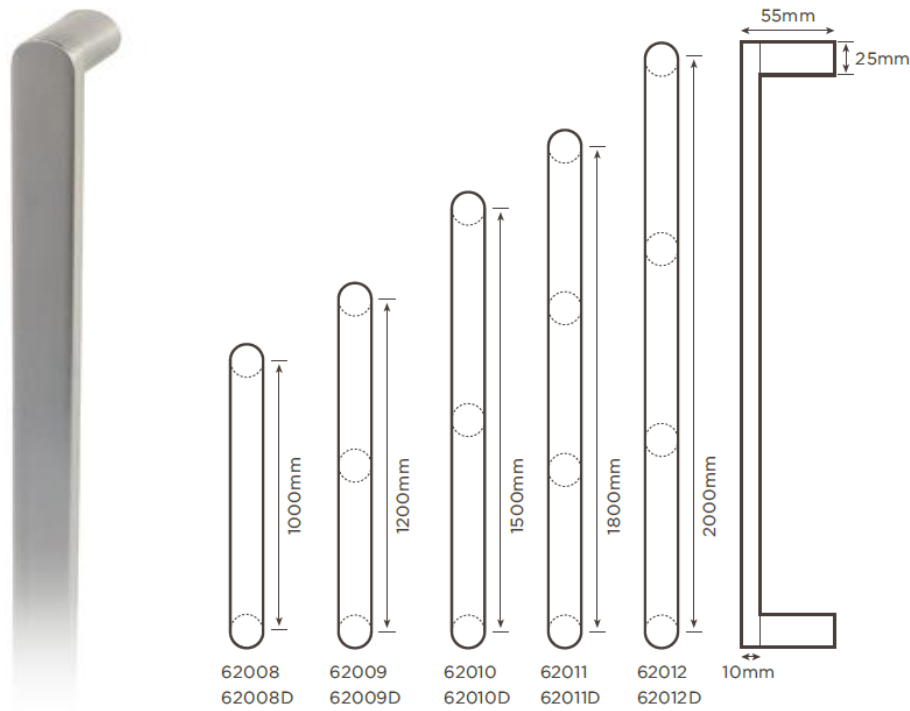

### Overview

- All pull handles are supplied with counter sunk machine bolts for door thickness up to 54mm
- Alternative fixing systems are available
- Manufactured from tubular grade 304 stainless steel
- Dimensions comply with the requirements of BS8300 and Approved Document M

### Finishes

- SSS Satin Stainless Steel
- PSS Polished Stainless Steel

### Maintenance

- To be carried out by approved specialist only
- No abrasives or chemicals to be used.
- Wipe with soft, damp cloth or, when necessary, warm soap warm and a soft cloth.
- At least once a year, check for tolerance and wear, and tighten any screws that may become loose.
- If for any reason, the products fail due to a defect in manufacture, contact us and we will advise on the replacement procedure.

### Packaging

Individually boxed with screws and care instructions. Multiple handles in an outer box (varies per order).

### Please note:

Aspex reserves the right to change specification without notice.