


Novista Riser Steel

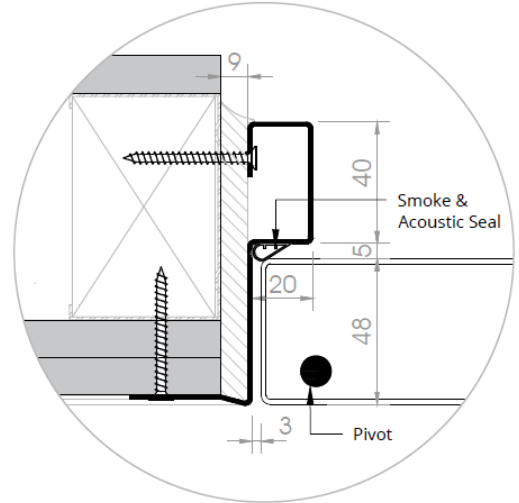

Frame	Concealed/Picture frame design made from 1.2mm steel. 3 or 4 sided frame options
Bi-Directional fire testing	Novista Risers are tested from both directions of attack from fire
Leaf	Double skin 1.0mm Zintec Steel with glass wool insulated core. 48mm thick
Finish	Primed or Polyester Powder Coat to RAL colour options
Configurations	Single leaf, double leaf and up to six leaves within one frame
Leaf Height/width	Up to 2850mm high and 1150mm wide leaves (please consult our technical department)
Hinge	Concealed quick release pivot hinge operation
Locking	3 point security lock as standard with square key operation. Cylinder option available
Intu-frame (option)	Dry intumescent seal expands behind the frame to seal tolerance gaps up to 15mm in event of fire, 50% greater than some other steel riser providers
Concealed lock option	Hides the chosen lock mechanism behind a flush hinged pocket

Performance

- Fire Rating** – FD120 (as standard)
- Acoustic Rating** – 41dB Rw (as standard)
- Smoke/Air tested** – To BS6375-1, BSEN1634-3 and to BSEN13501-2
- Thermal Resistance** – 1.43(m2K)/W

